

CITR ★ Q61 90-141799/19 ★ FR 2636-686-A
Removable mounting stud - has quarter turn, spring loaded lock bar
with positive locating grooves

AUTO CITROEN & PEUGEOT 22.09.88-FR-012388

(23.03.90) F16b-17 F16b-19/02


22.09.88 as 012388 (1488JT)

The assembly consists of a pin (1) with head (2) and attachment lug (14) to accept the component to be supported. The pin is fitted with a lock bar (3). A flanged bush (9) is situated between the head and the lock bar with a spring washer (6) interposed under the head.

The support (11) has an elongated hole (10) of the same form as the lock bar and the bush. The hole has a surrounding turned-in flange (12). The lock bar has two parallel grooves (13) which locate positively onto the parallel edges of the flange.

ADVANTAGE - Stud can be installed by simple insertion against spring pressure with quarter turn locking action. (11pp Dwg.No.1/8)

N90-109879

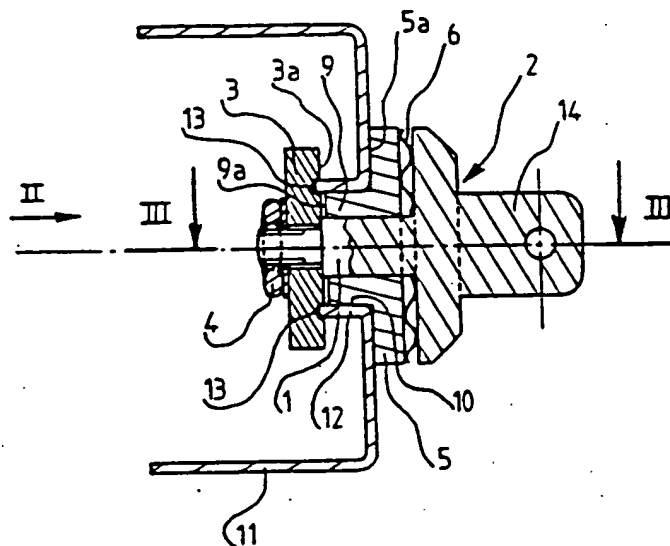

© 1990 DERWENT PUBLICATIONS LTD.
128, Theobalds Road, London WC1X 8RP, England
US Office: Derwent Inc., 1313 Dolley Madison Boulevard,
Suite 303, McLean, VA22101, USA
Unauthorised copying of this abstract not permitted.